

FICHE TECHNIQUE - SPEC SHEET



INTERMAT
PORTES, ESCALIERS ET BOISERIES

Quincaillerie / Hardware

Modèle / Model

ASHFIELD



HALL/CLOSET



BED/BATH



KEYED ENTRY



INACTIVE

Product has visible screws

SPECIFICATIONS

DOOR PREP	Cross Bore 2-1/8" Edge Bore 1" Latch Face 1"x2-1/4"
BACKSET	Adjustable to 2-3/8" or 2-3/4" UL 2-3/4" standard 2-3/8" optional
DOOR THICKNESS	1-3/8"–1-3/4" doors standard thickness 2-1/4" doors optional on GLA101 and GLA535
CYLINDER	Standard SmartKey
FACEPLATE	1"x2-1/4" Square, radius corner and drive-in standard
STRIKES	2-1/4" full lip. Specify round corner or square corner Other options available
BOLT	1/2" throw. Nickel plated
DOOR HANDING	Specify handing only with Inactive levers
ANSI/BHMA	A156.2 Grade 2
ADA	Functions GLA 101, GLA 12 satisfies section 4.13.9 ADA requirement
UL AVAILABILITY	Meets 3 hour fire rating for all UL functions when fronted latches used Meets 20 minute with drive-in latch
ASTM	All Weiser product meets ASTM E 331 water penetration testing

FICHE TECHNIQUE - SPEC SHEET




INTERMAT
PORTES, ESCALIERS ET BOISERIES

Quincaillerie / Hardware


Modèle / Model

ASHFIELD

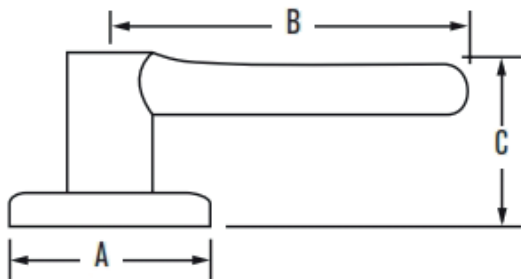


	A	B	C	C (Keyed)
Ashfield	2-5/8"	4-3/16"	2-9/16"	2-7/8"


6-WAY ADJUSTABLE LATCH

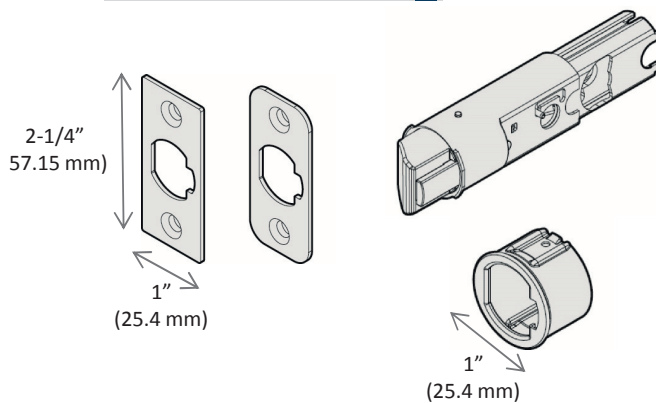

FULL LIP SQUARE CORNER



FULL LIP RADIUS CORNER



A	2-1/4" (57.15 mm)
B	1-5/8" (41.275 mm)
C	1-3/4" (44.45 mm)

PRODUCT AVAILABILITY



SATIN NICKEL



IRON BLACK

		20 min.	3 Hour	Satin Nickel	Iron Black
Passage	GLA101 ADL	☐	☐	☐	☐
Privacy	GLA331 ADL			☐	☐
Entry	GLA535 ADL	☐	☐	☐	☐
Inactive	GLA12 ADL			☐	☐